




## SPECIFICATION SHEET

### KERFKORE®

- ✓ Dynamic Bending Radius 3 1/2"
- ✓ Stable Base Layer
- ✓ Laminate Flat, Then Form
- ✓ Edgeband Ready

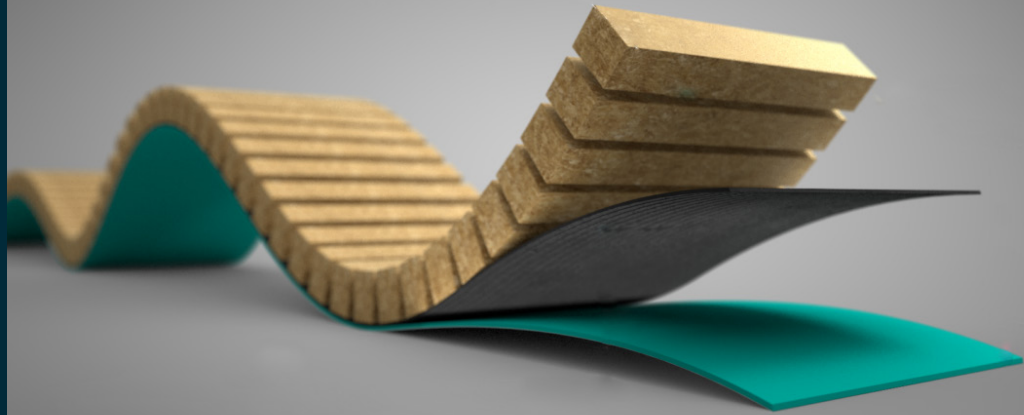

## MATERIALS



### FACING

LTX Black Flexible Backer



### CORES

- Standard Particleboard
- MDF
- Plywood
- Fire Rated Particleboard 🔥
- NAUF Particleboard 🌿




### DECORATIVE SURFACE

- High-Pressure Laminates
- Two-Ply Veneer
- Phenolic Backed Veneer
- 20mil Paper Backed Veneer
- Metal
- Leather
- Other Similar Materials

## THICKNESS

	1/4"	3/8"	1/2"	5/8"	11/16"	3/4"
Particleboard		✓	✓	✓		✓
Plywood			✓	✓		✓
MDF	✓	✓	✓	✓		✓
NAUF Particleboard 🔥🌿					✓	✓

## NOMINAL PANEL SIZE

	48" x 96"	49" x 97"	61" x 97"	48" x 120"	48" x 144"
Particleboard		✓	✓	✓	✓
Plywood	✓				
MDF	✓			✓	✓
NAUF Particleboard 		✓			

## STANDARD KERFKORE PRODUCTS

Item #	Core Material	Nominal Panel Size	Thickness	Weight/Square Foot
SK50PB	Particleboard	49" x 97"	1/2"	2.0lbs
SK62PB	Particleboard	49" x 97"	5/8"	2.5lbs
SK75PB	Particleboard	49" x 97"	3/4"	3.0lbs

For other thickness sizes and material options, contact us at [912.264.6496](tel:912.264.6496)

## STORAGE & HANDLING

**Proper Air Circulation** – Store flat with black side facing up in a dry area away from direct contact with the floor.

**Handling** – When rolling into a coil, keep the black side facing out.

To prevent pinching, keep fingers clear of grooves.

**Temperature Conditioning** - Acclimate Kerfkore to the same environment as the decorative surfacing materials. Two to three days recommended for conditioning. Use guidelines recommended by the decorative surfacing manufacturer.

**Note:** During handling, creasing may occur if Kerfkore is bent towards the black side. This will not cause telegraphing on the finished product.

## TESTING

Cannot be used in wet applications.

**Impact Resistance** - Approximately the same as unkerfed core material.

**Flame Spread Test** - Call 912-264-6496 for additional information.

## BEND TYPE (RIB DIRECTION)



48" x 96"  
Column Bend



96" x 48"  
Barrel Bend

# DECORATIVE SURFACING APPLICATION METHODS

## J-ROLLER APPLICATION

### Equipment Needed

- Kerfkore panel
- Decorative surface material
- J-Roller
- Contact cement (solvent or water-based)
- **i DO NOT USE RIGID SETTING ADHESIVES** (i.e. PVAC, hot melt glue, epoxy, etc.)
- Sprayer, brush, or roller
- Tack cloth

### Prep

1. Remove all dust and debris from panel surface

### Application

1. Adhesive Application – Use a sprayer, brush, or roller to apply a medium coat of contact adhesive to both decorative and Kerfkore surface.  
**Tip:** Less adhesive is generally better than too much. Use a test strip to determine the correct amount of pressure and adhesive.
2. Decorative Surface Application
  - a) Use LIGHT TO MODERATE pressure with initial placement/positioning of the decorative surfacing material to Kerfkore.
  - b) Use firm hand pressure or moderate pressure with a J-Roller.

**DO NOT OVERPRESS!** Over pressing can cause ridge lines and stress cracks.

### Finishing

**Dry Time & Temperature** - Follow glue manufacturer's recommendations.

**Finishing** – Using a router, remove unwanted decorative surface material.

**Note:** If edgebanding by hand, use contact adhesive. If using an edgebanding machine, use PVA glue.

### Forming

- a) **Framework Attachment** - Bend Kerfkore to desired shape and attach to framework.
- b) **Rigid / Free-Standing Part** - Attach a backing sheet to the rib side to lock Kerfkore into desired shape. Use PVA or wood glue. For maximum consistency and uniformity, use a vacuum forming process.

**Note:** Maximum Bending Radius is directly related to the flexibility of decorative surface material. While a smaller radius may be obtainable, it is best to test before proceeding.

- **i** Surfacing materials become more brittle when cold. Always condition decorative surfaces to the manufacturer's recommended temperature prior to bending.

# DECORATIVE SURFACING APPLICATION METHODS

## PRESS MACHINE APPLICATION

### Equipment Needed

- Kerfkore panel
- Decorative surface material
- Hydraulic or vacuum press
- PVA glue
- Sprayer, brush, or roller
- Tack cloth

### Prep

1. Remove all dust and debris from panel surface

### Application

1. Adhesive Application – Use a sprayer, brush, or roller to apply a medium coat of PVA glue to either the decorative or Kerfkore surface.

**Tip:** Less adhesive is generally better than too much. Use a test strip to determine the correct amount of pressure and adhesive.

2. Decorative Surface Application

Place Kerfkore product with decorative surface in the press.

Recommended Uniform Pressure: 30-35 PSI

Exceeding pressure recommendation can affect flexibility and bending radius.

### Finishing

**Dry Time & Temperature** - Follow glue manufacturer's recommendations.

**Finishing** – Using a router, remove unwanted decorative surface material.

**Note:** If edgebanding by hand, use contact adhesive. If using an edgebanding machine, use PVA glue.

### Forming

- a) **Framework Attachment** - Bend Kerfkore to desired shape and attach to framework.
- b) **Rigid / Free-Standing Part** - Attach a backing sheet to the rib side to lock Kerfkore into desired shape. Use PVA or wood glue. For maximum consistency and uniformity, use a vacuum forming process.

**Note:** Maximum Bending Radius is directly related to the flexibility of decorative surface material. While a smaller radius may be obtainable, it is best to test before proceeding.



Surfacing materials become more brittle when cold. Always condition decorative surfaces to the manufacturer's recommended temperature prior to bending.